

Micro-structural characterization of Green River shale from GSA inversion

Malleswar Yenugu and Tao Jiang, University of Houston

SUMMARY

A detailed knowledge of microstructure properties help us to understand the pore connectivity, fluid mobility, which is critical in successful characterization of unconventional shale reservoirs. We used GSA (Generalized Singular Approximation) method to determine the microstructure such as pore/crack shape, and their connectivity for the Green River shale outcrop samples. The optimized anisotropic microstructure properties can be obtained from solving an inverse problem of GSA modeling, by minimizing the objective function, which is defined as the difference of anisotropic P and S velocities between ultrasonic measurements and the GSA calculation.

INTRODUCTION

One of the major challenges to characterize the shale reservoirs is to get the microstructure information i.e. the clay platelet orientation, the type, density, shape and connectivity of the inclusions. These are directly linked to three physical parameters: porosity, aspect ratio and friability with the assumption that the pore/cracks are gas filled and have ellipsoidal shape.

The problem of calculating the effective stiffness tensor is a many body problem, which can be solved, in general case, only approximately (Chesnokov et al. 1995). The majority of the methods of effective medium theory is based on the Eshelby (1957) solution, which finds the strain field in an individual ellipsoidal inclusion embedded in a homogeneous matrix with other elastic properties, caused by a stress (or strain) field applied at infinity. In the effective medium theory, it is assumed that the inclusions (mineral grains, pores and cracks) have an ellipsoidal shape. Hornby et al. (1994) used biconnected clay matrix cracks in isotropic clay matrix and rotated them in accordance with the distribution function of the clay platelet orientation. Then, silt-sized minerals were inserted resulting the anisotropic 'clay-cracks' material.

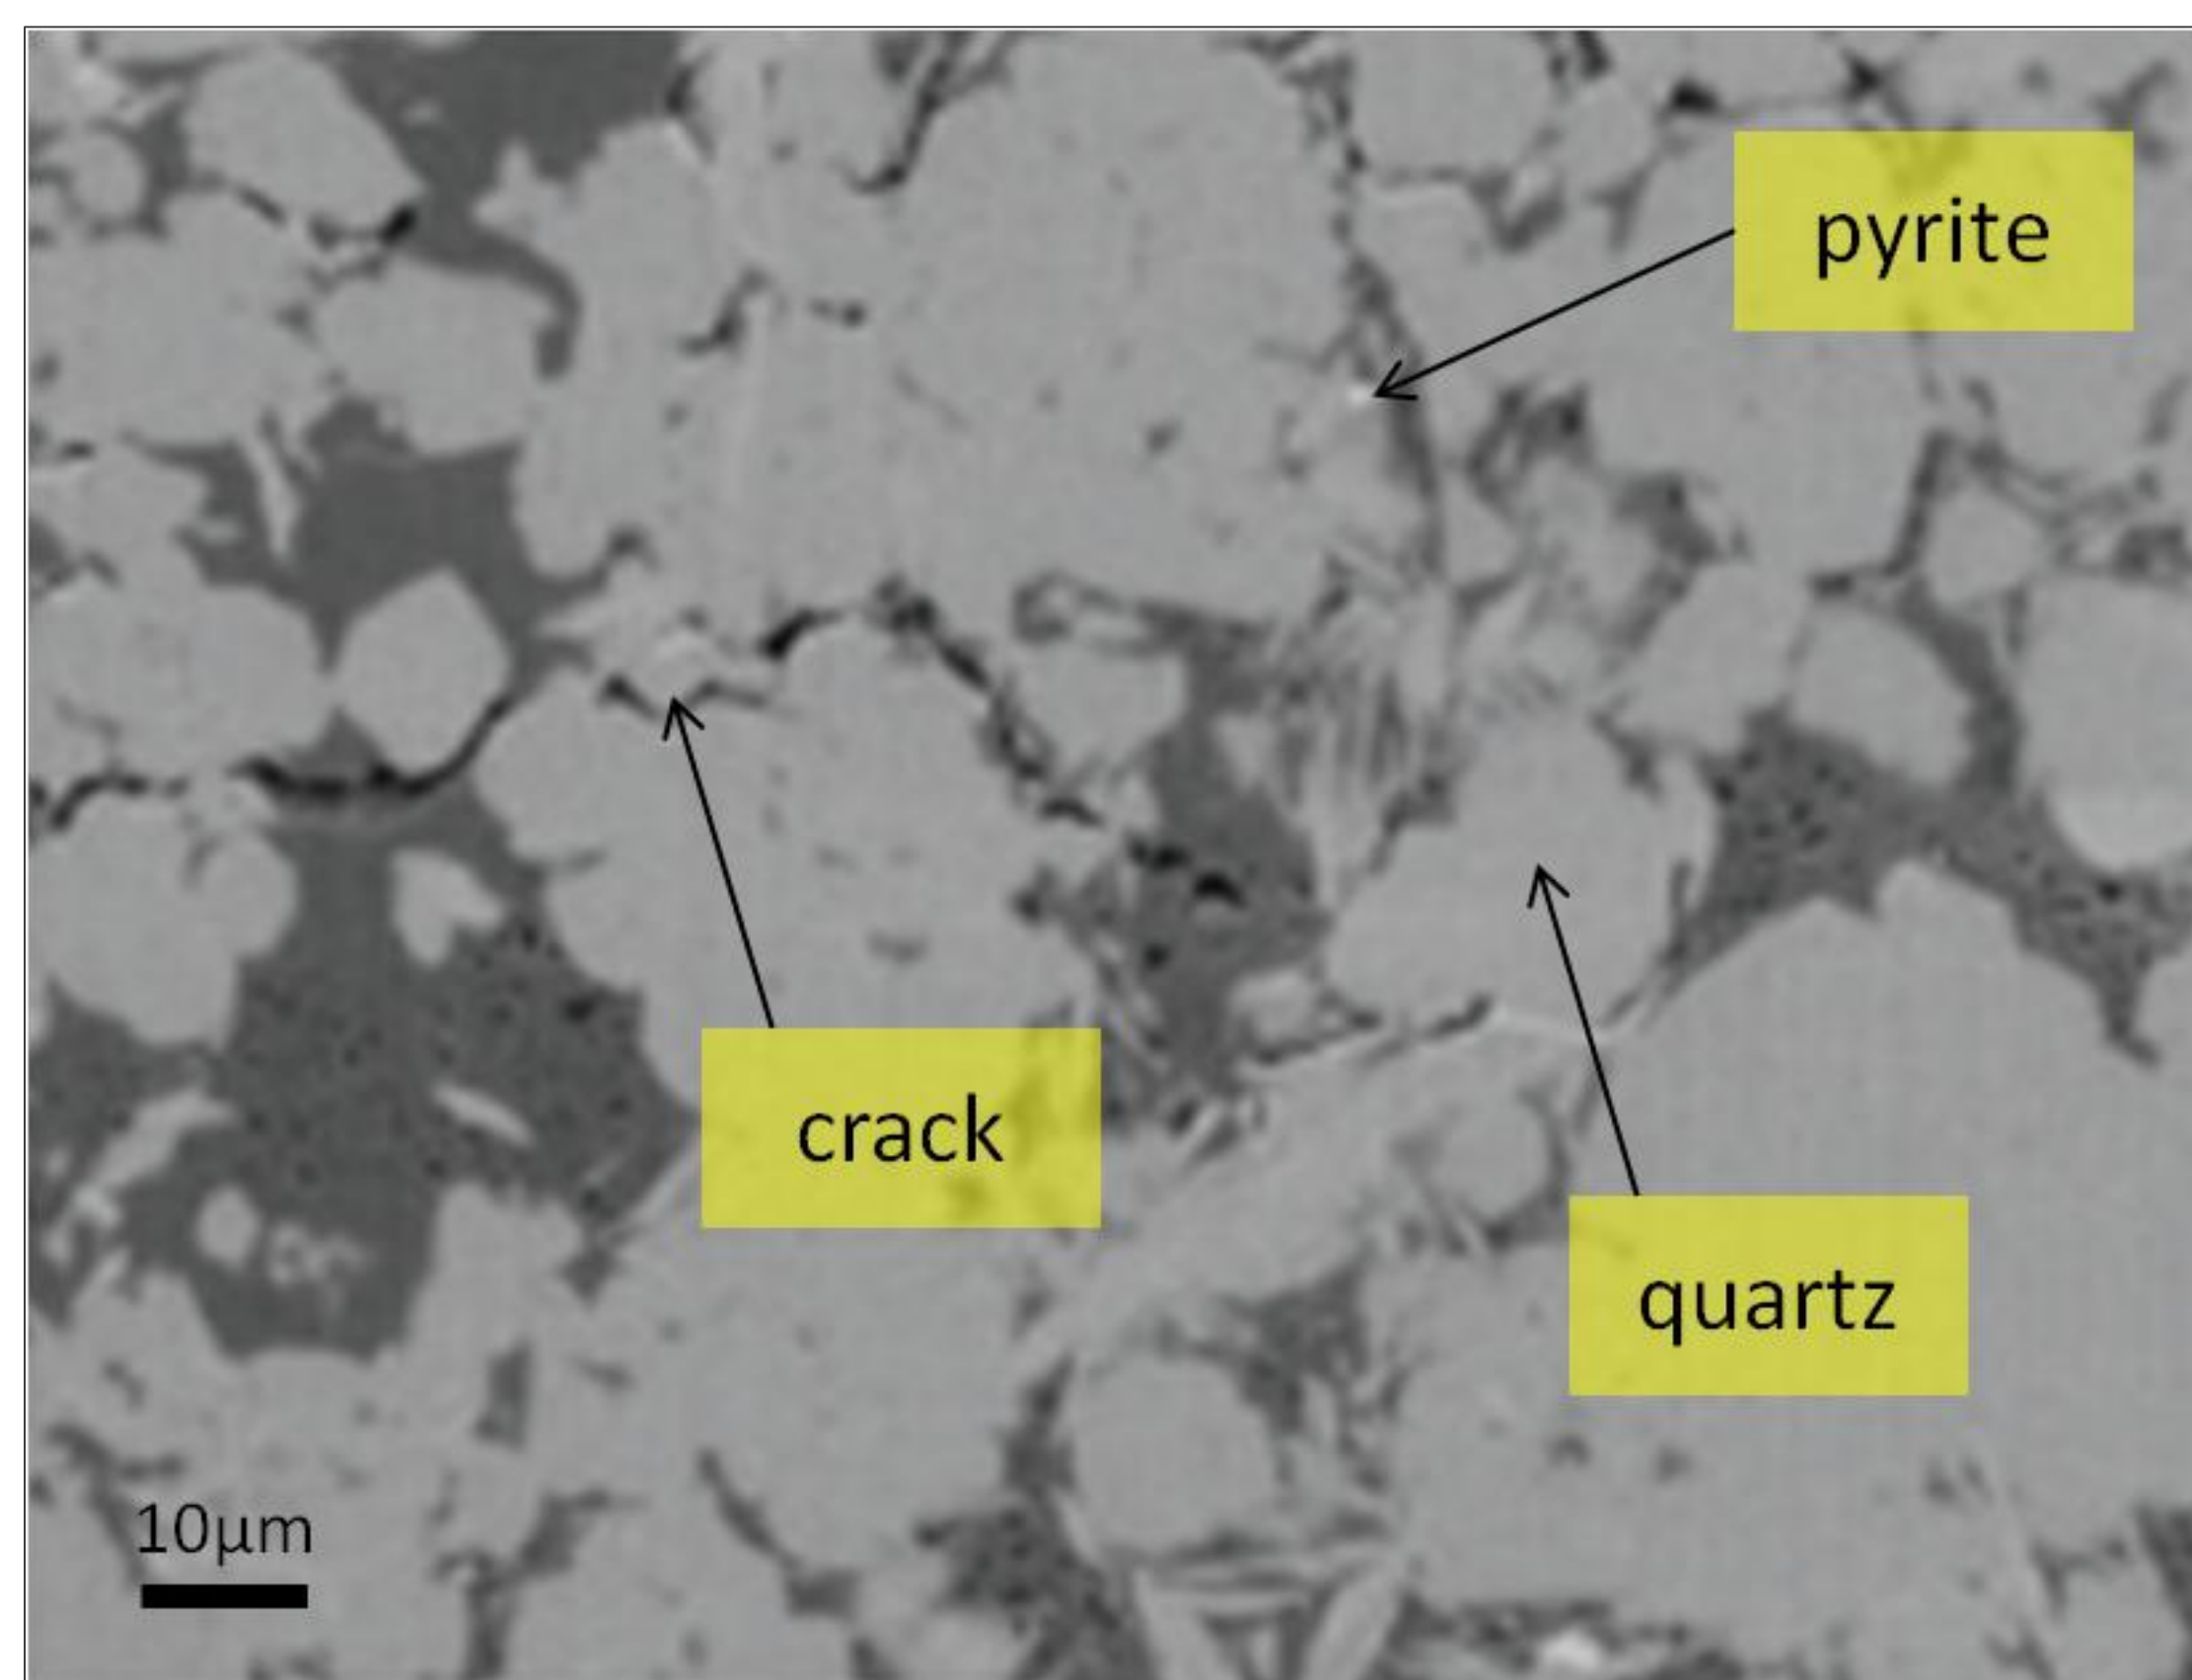


Figure 1: SEM image of a shale microstructure

We used GSA method to compute the effective elastic constants of cracked anisotropic media for arbitrary crack concentration and aspect ratio. We consider that clay forms a matrix containing grains of different minerals, pores and cracks with different shape and orientation as inclusions. This consideration is in line with the microstructure seen in SEM (Scanning Electron Microscope) image shown in Figure 1.

GENERALIZED SINGULARITY APPROXIMATION (GSA)

GSA (Shermergor, 1977) uses the singular part of Green's function to get the analytic solution. GSA is a powerful effective medium modeling method for porous media. It gives the effective properties of the whole medium provided the components of the rock (i.e. matrix and inclusions). The advantages of GSA over other EMT (Effective Medium Theory) models are: GSA can handle large volume of inclusions, it takes into account the effect of the connection of pores, it works for arbitrary ellipsoidal inclusion with any aspect ratios, it assumes that the elastic properties are anisotropic for both matrix and inclusions.

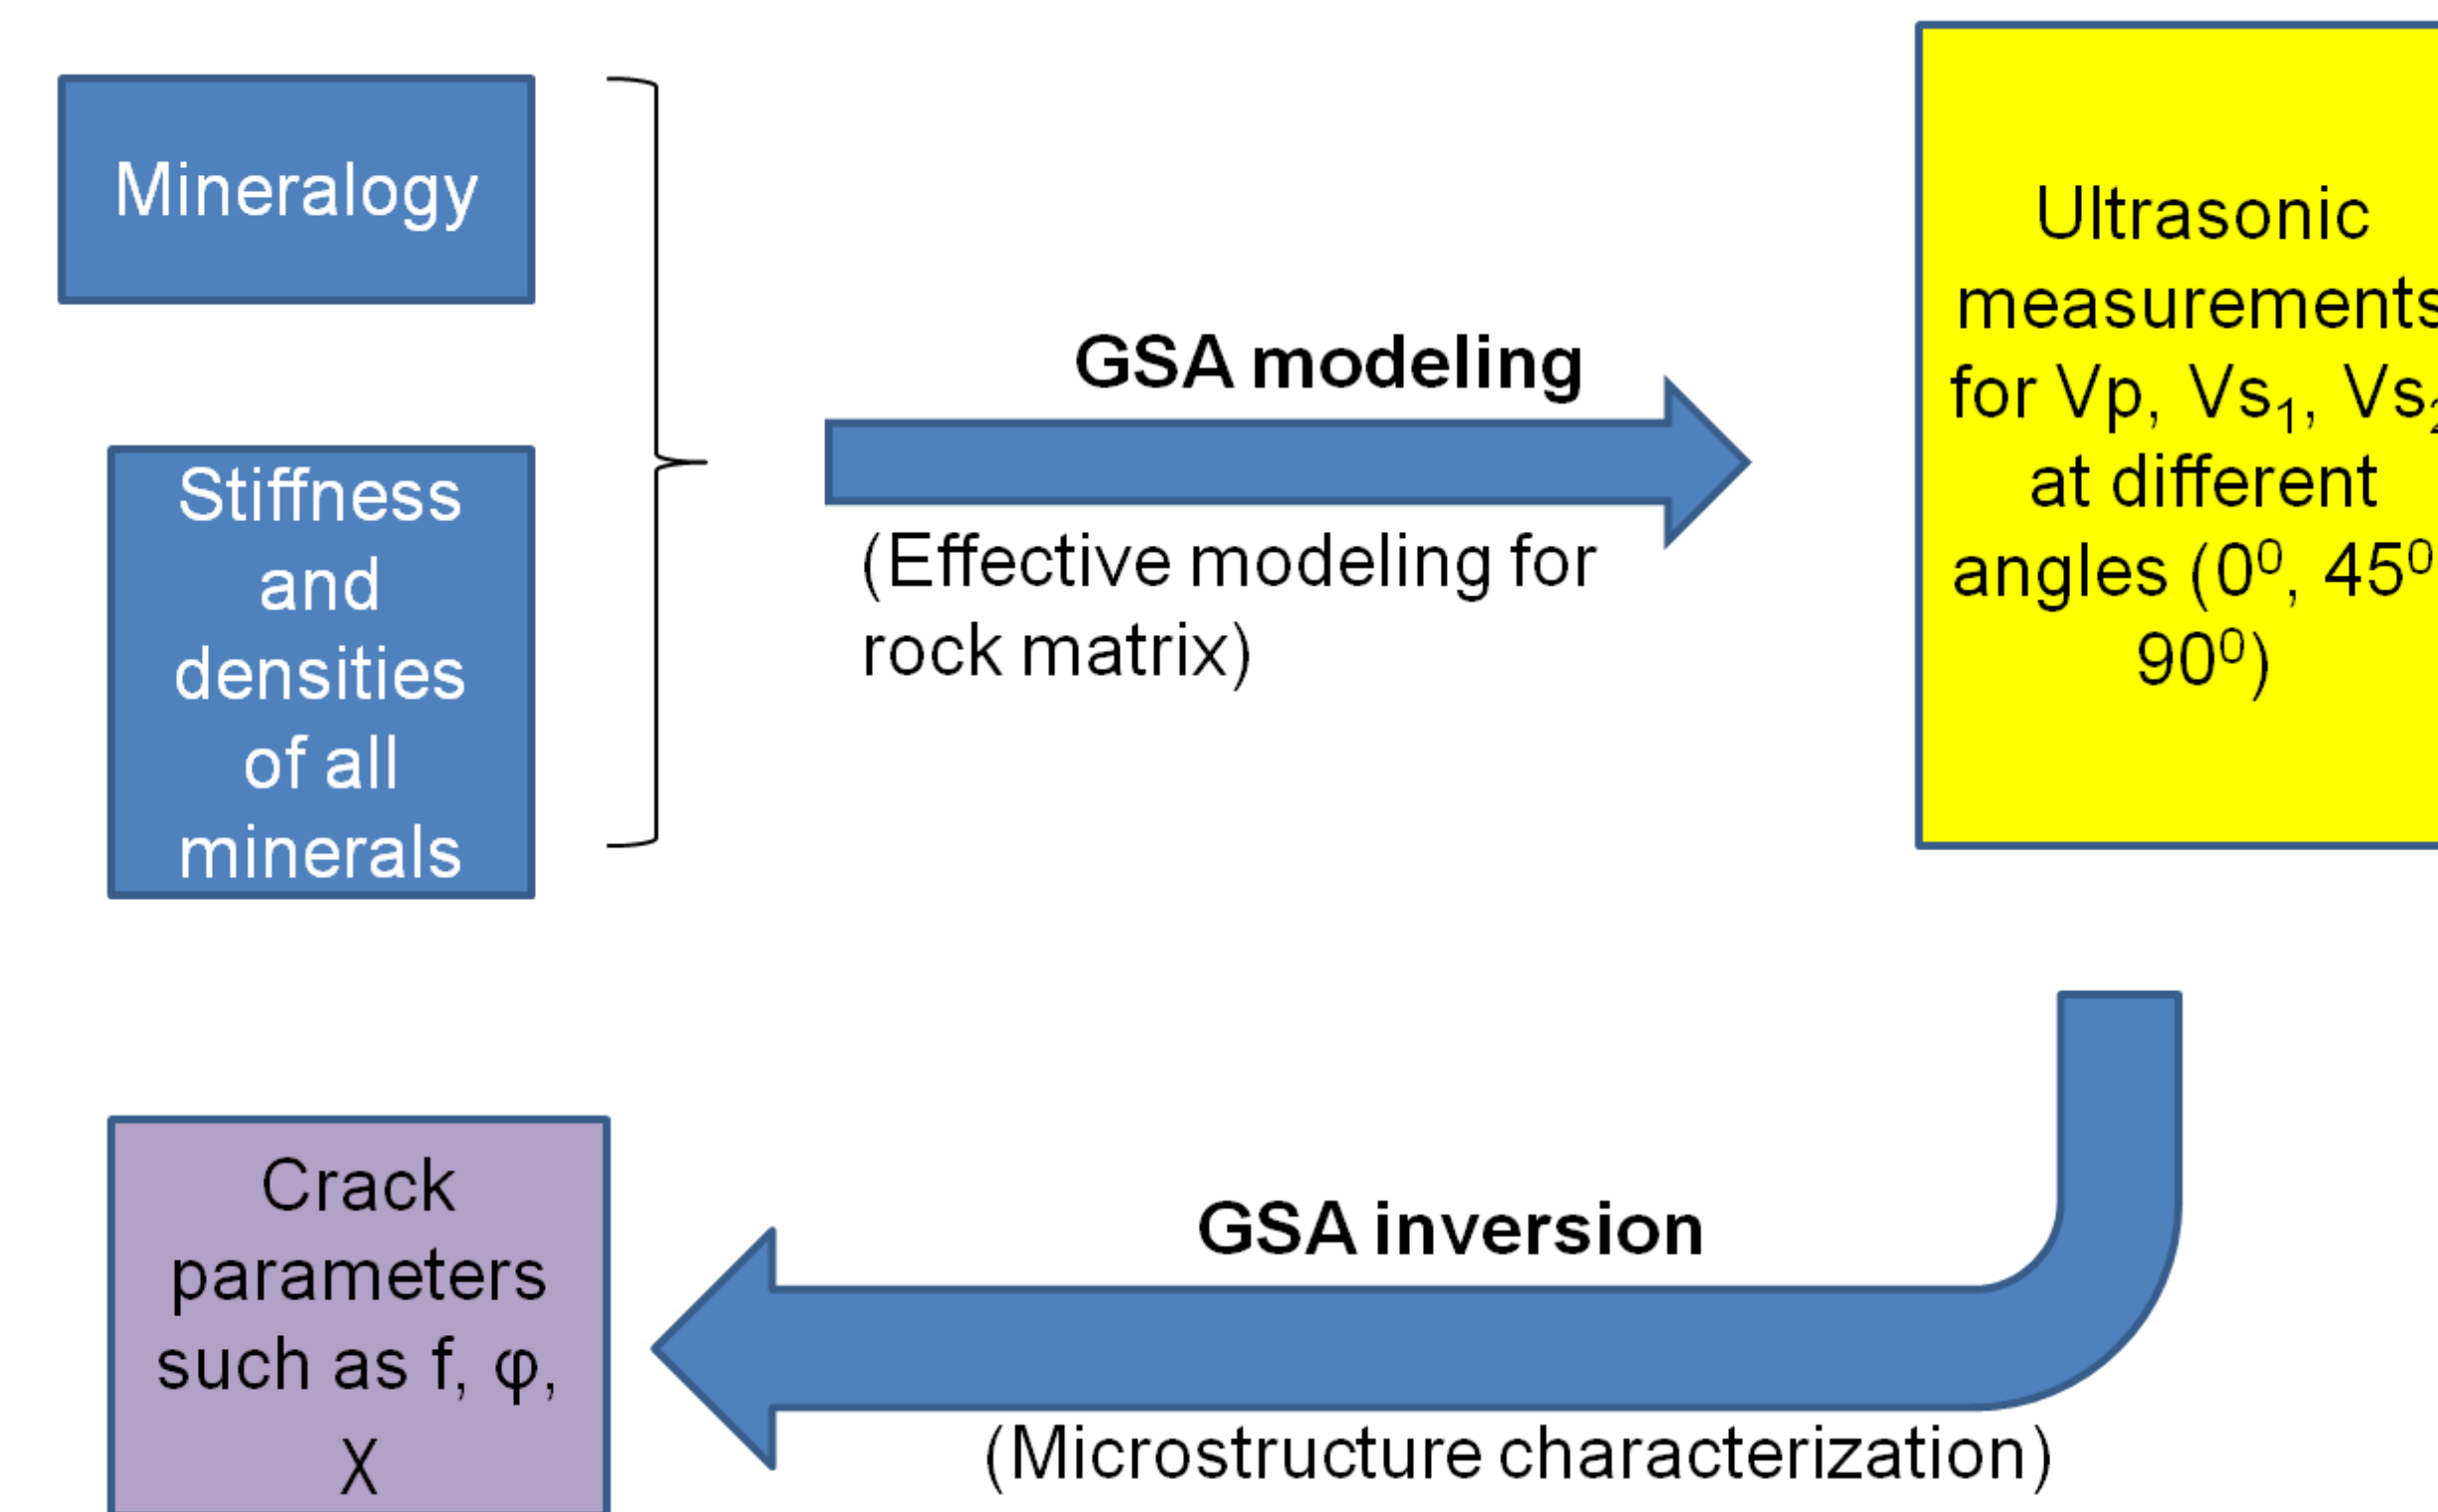


Figure 2: Workflow for GSA method

Figure 2 shows the workflow for the GSA modeling and inversion for microstructural characterization. Bayuk and Chesnokov (1998) used the stiffness tensor of the reference body for a porous cracked medium in the form of a combination of matrix and fluid stiffness tensors as $C_c = (1-f) C_m + f C_f$. Here the indices m and f are matrix and fluid respectively. The coefficient f is called the friability, which is an empirical coefficient that to some degree reflects pore/crack connectivity.

In the second step, inversion is carried out which includes pores/cracks. It uses the GSA result from pure minerals as matrix and adds gas-filled pore/cracks as inclusions. Finally, we get the following microstructural properties from the inversion: 1. porosity (ϕ) 2. aspect ratio of cracks (χ) and 3. friability (f). A global search algorithm is applied for the range of above parameters to minimize the objective function. Figure 3 shows the schematic for the microstructure properties from GSA modeling and inversion.

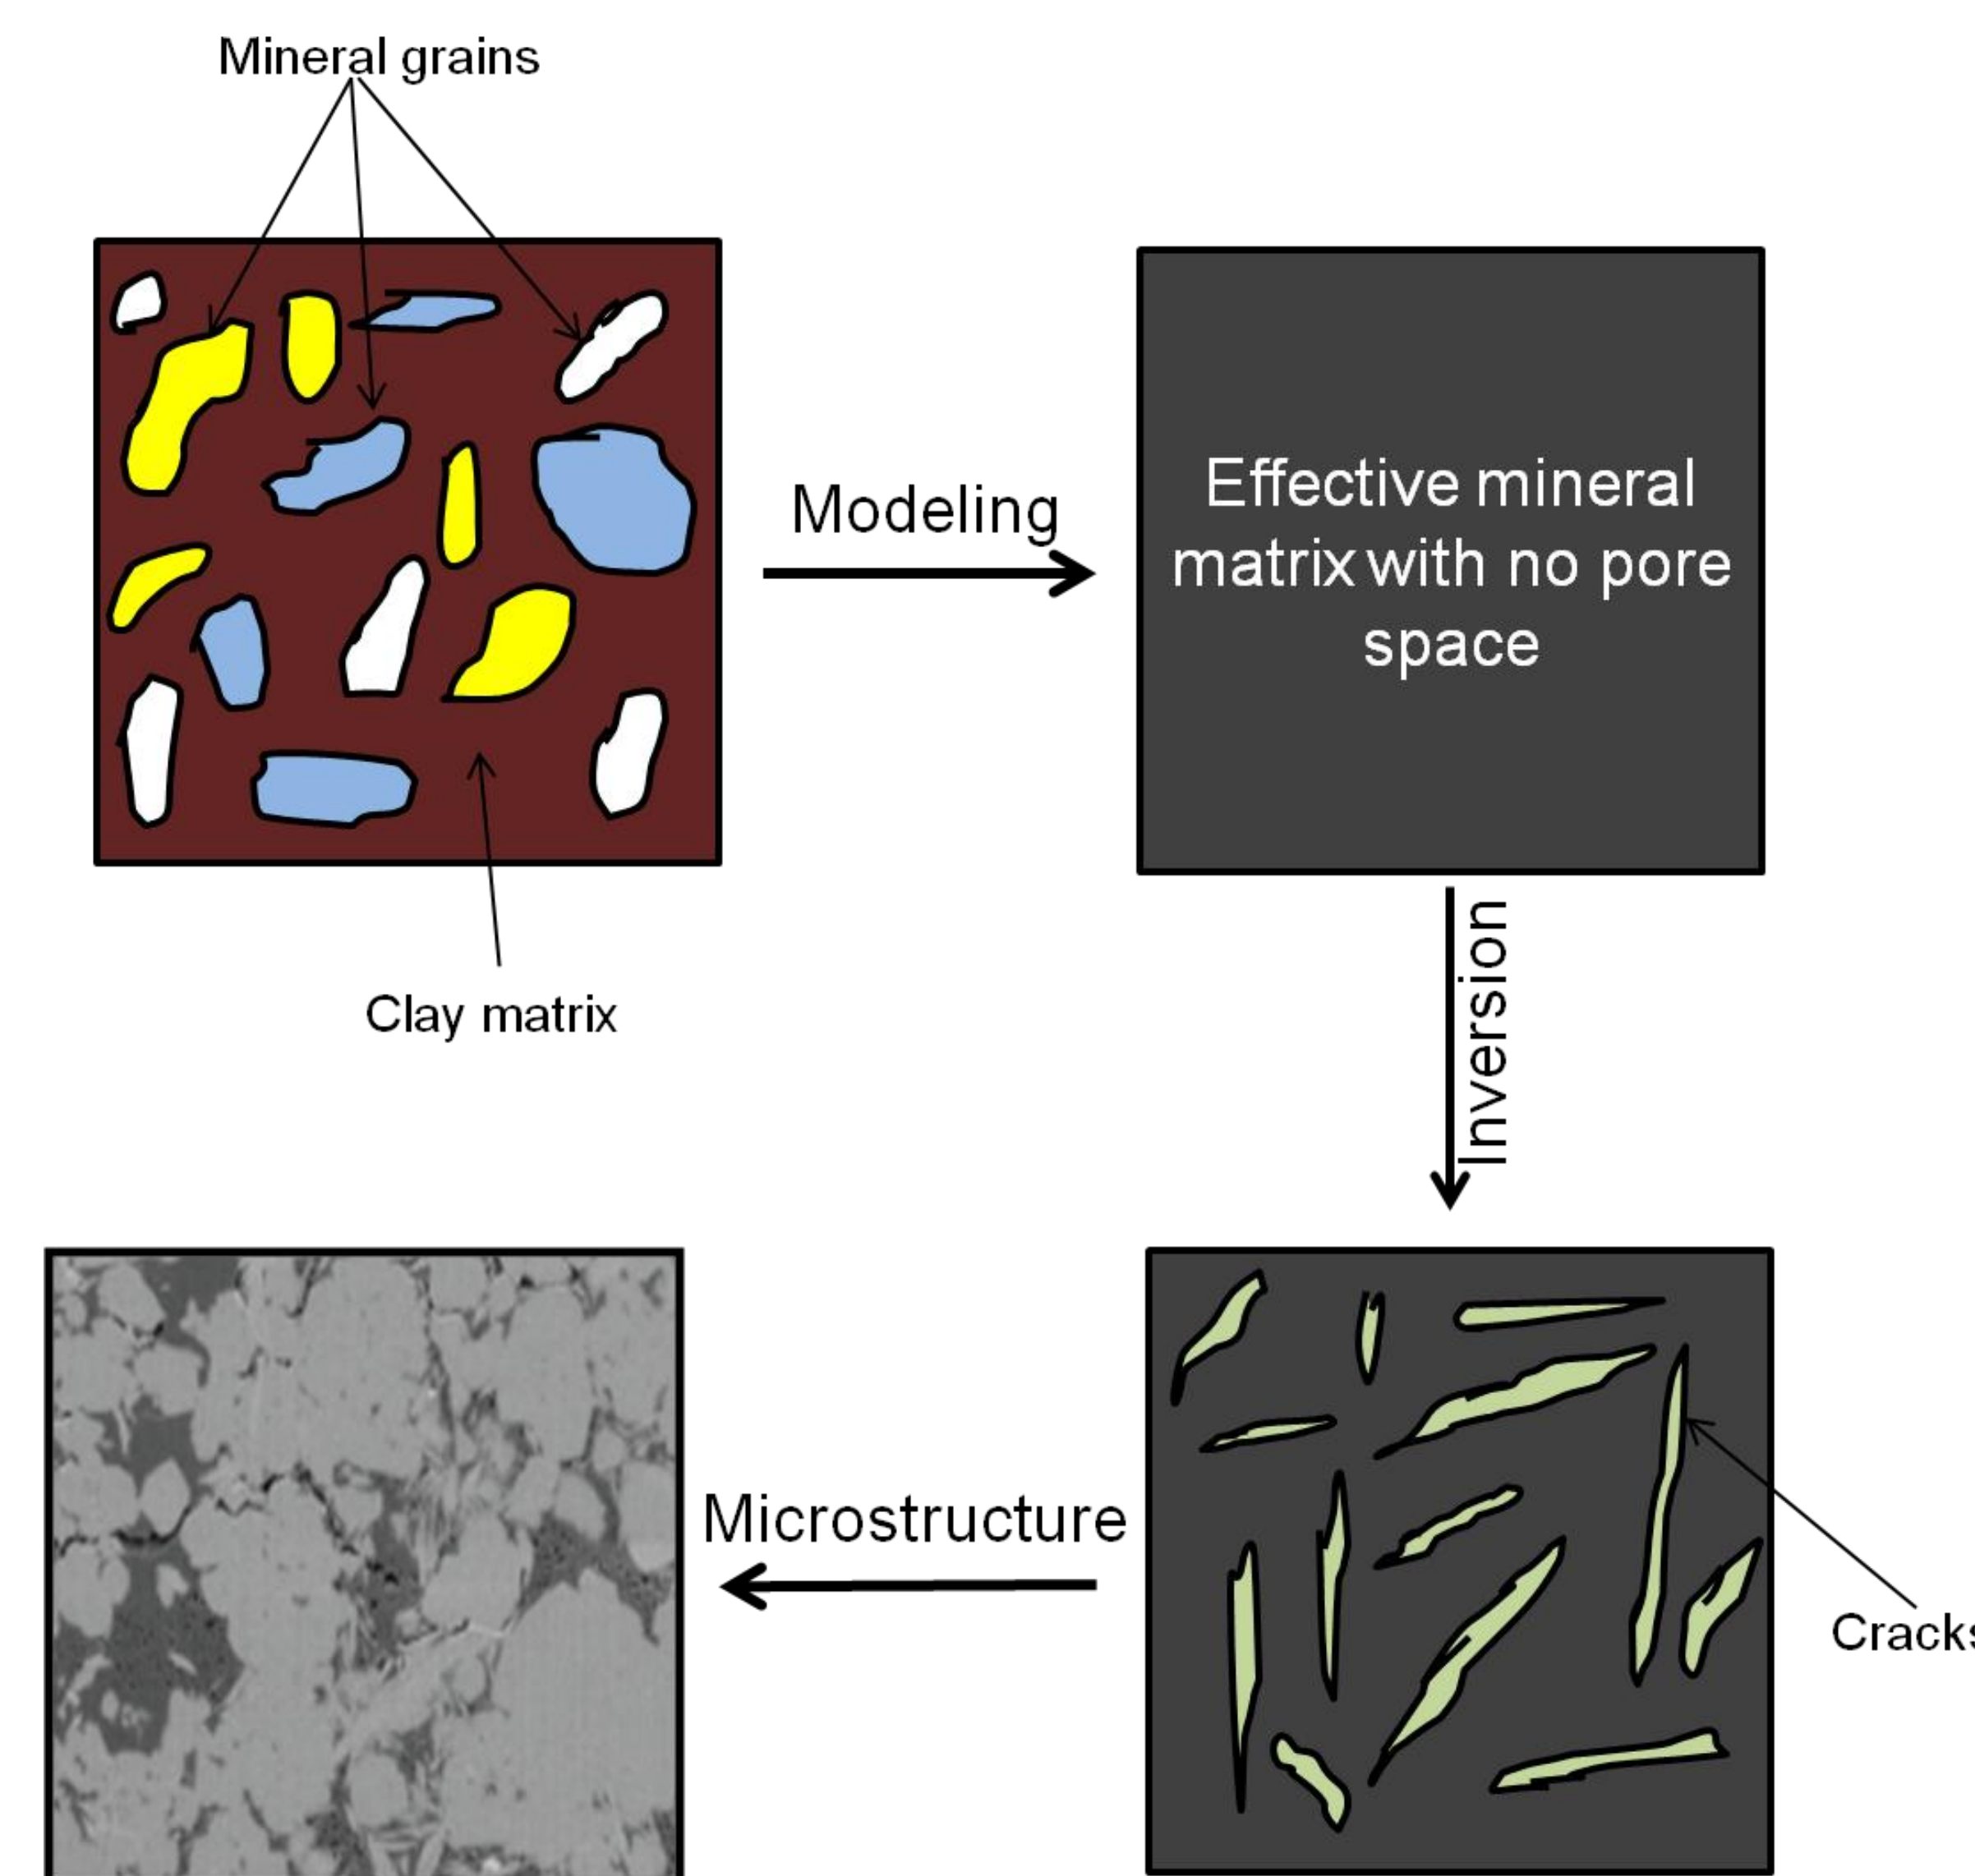


Figure 3: Schematic of GSA method for microstructural characterization

EXAMPLE: GREEN RIVER SHALE

GSA modeling for the Green River shale is carried out using the mineral composition measured by FTIR, the elastic constants and densities taken from published literature. The velocities calculated and measured from ultrasonic are plotted for the three plugs and shown in the Figure 4. The difference between the velocities is due to only the mineral matrix is considered.

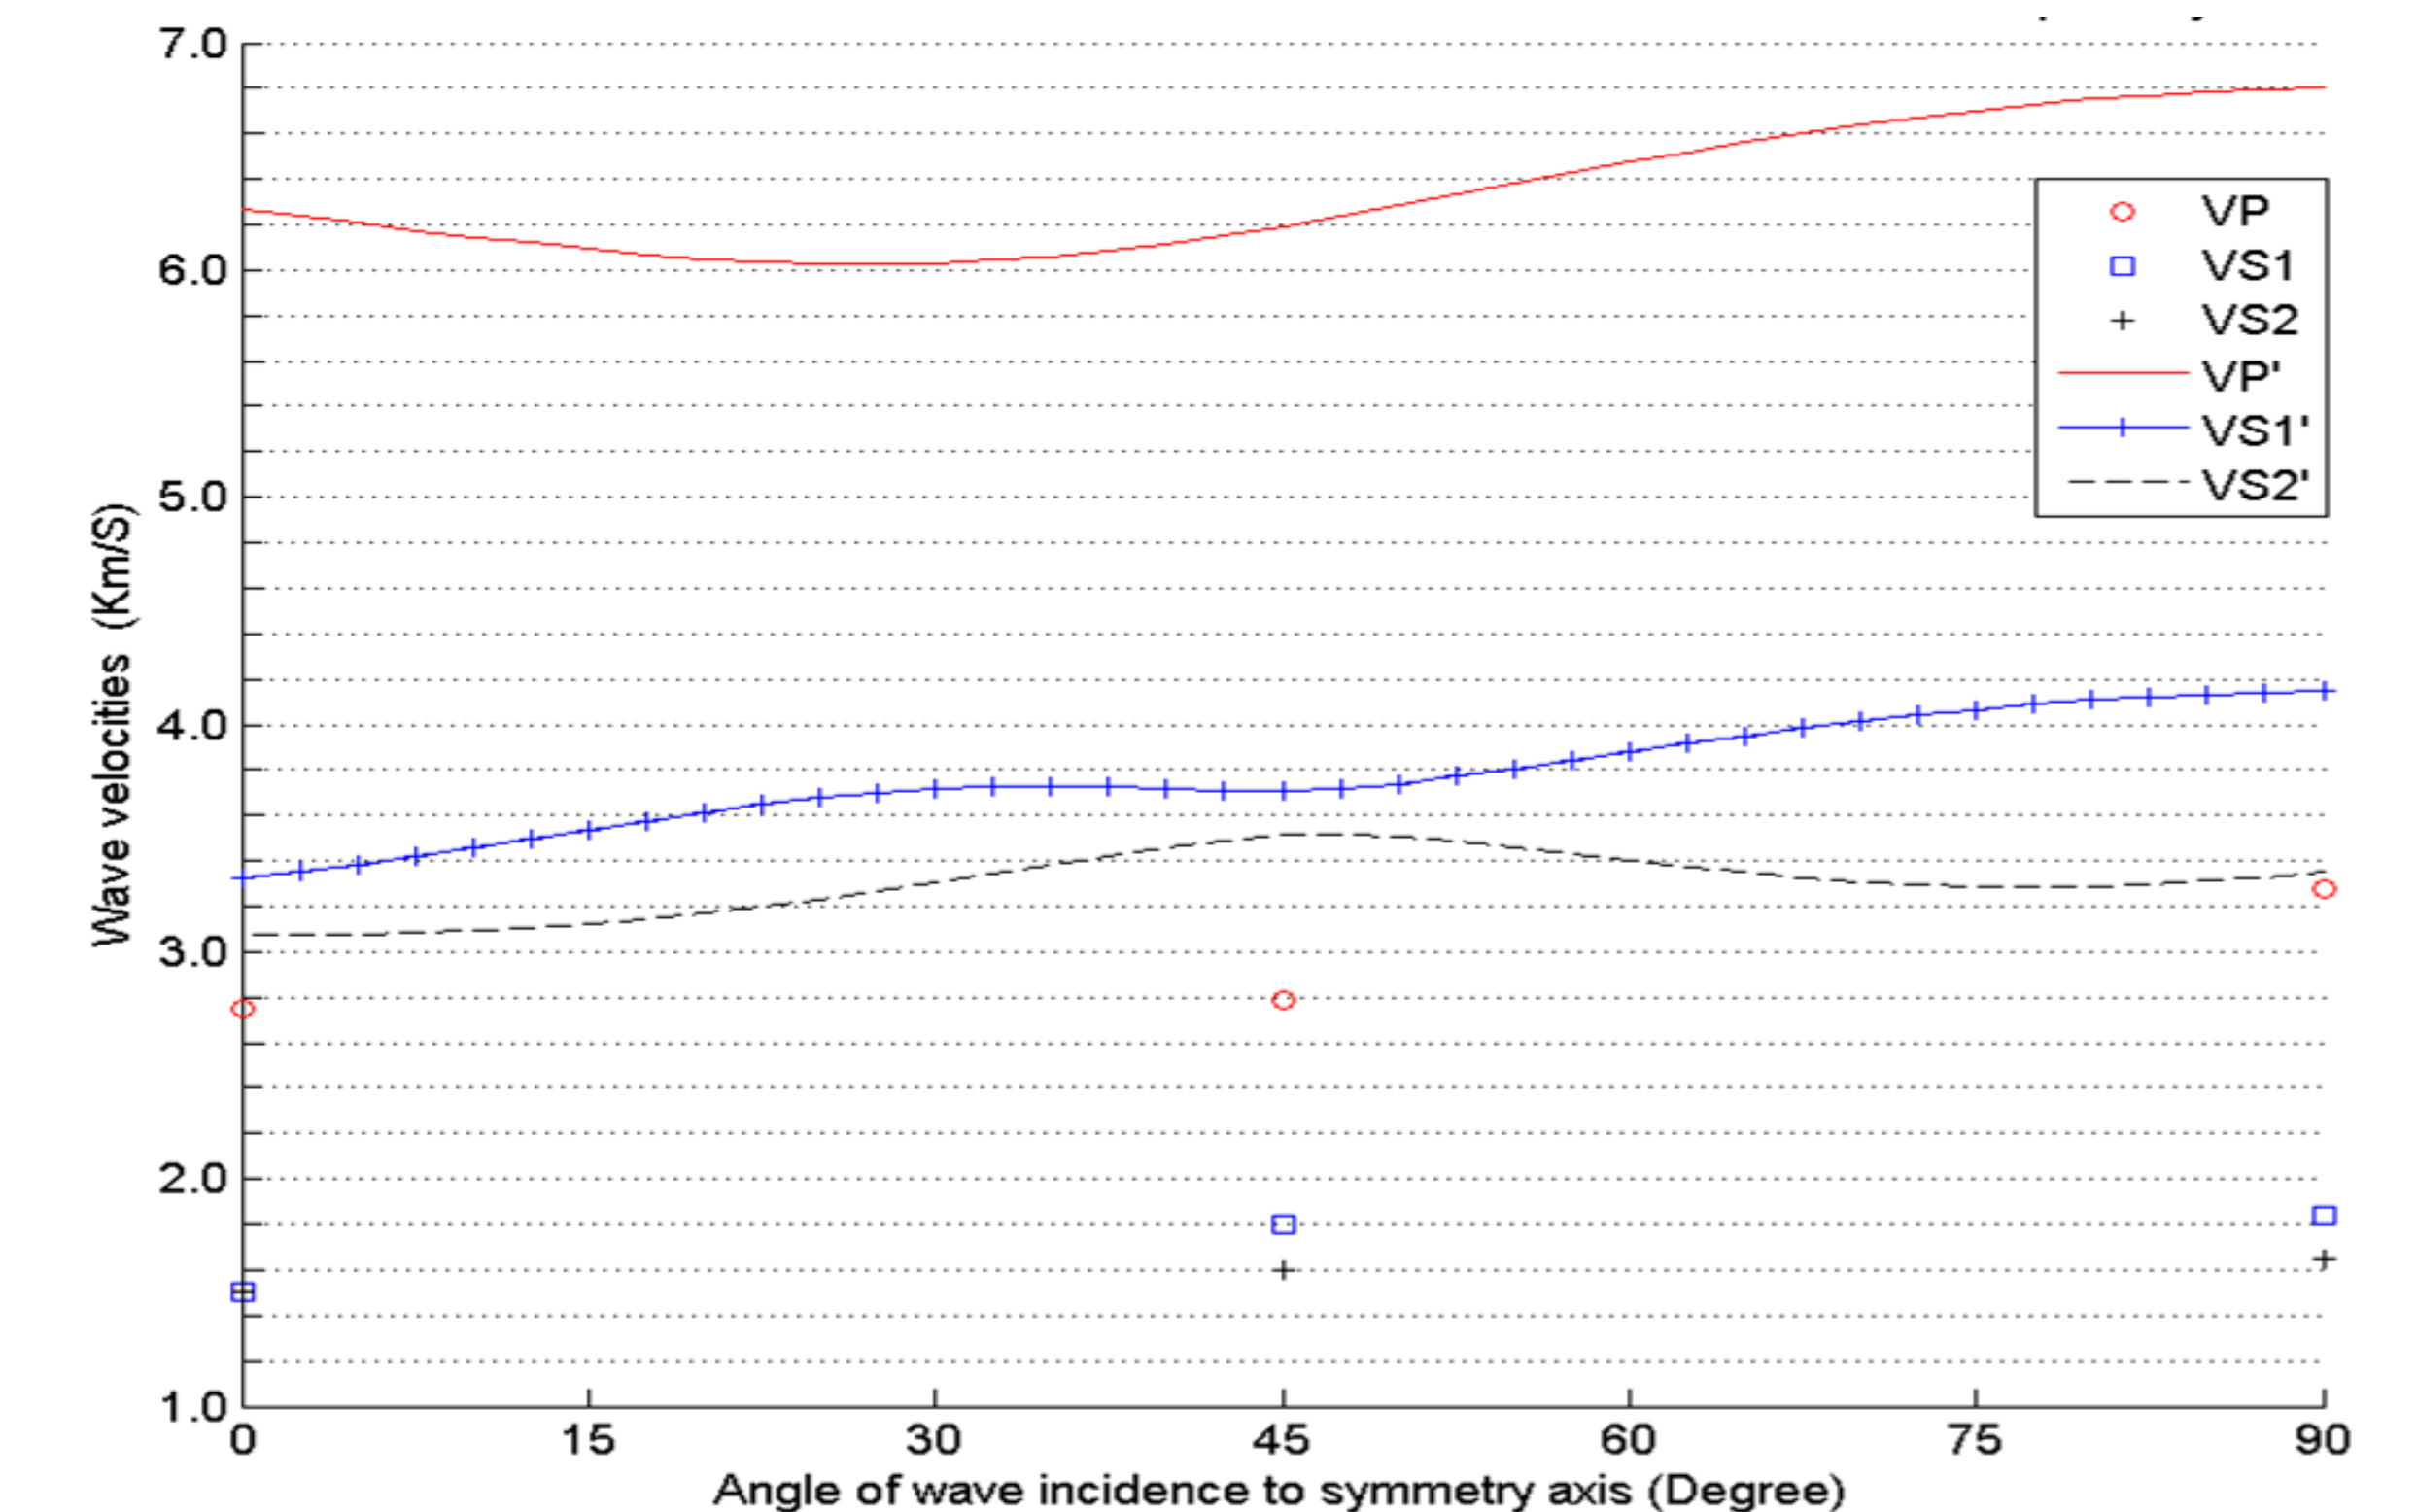


Figure 4: GSA modeling for pure mineral composite

From the inversion result (Figure 5), the aspect ratio (χ) is estimated around 0.9046, which infers that the shape of the fluid inclusions is almost spherical. The friability (f), which indicates the connectivity between inclusions, is estimated around 0.9057. The range of friability is between 0 and 1, where 0 is considered as no connection and 1 is considered as well connected among the inclusions. So, the calculated friability from the inversion indicates that there is a good connection between the inclusions.

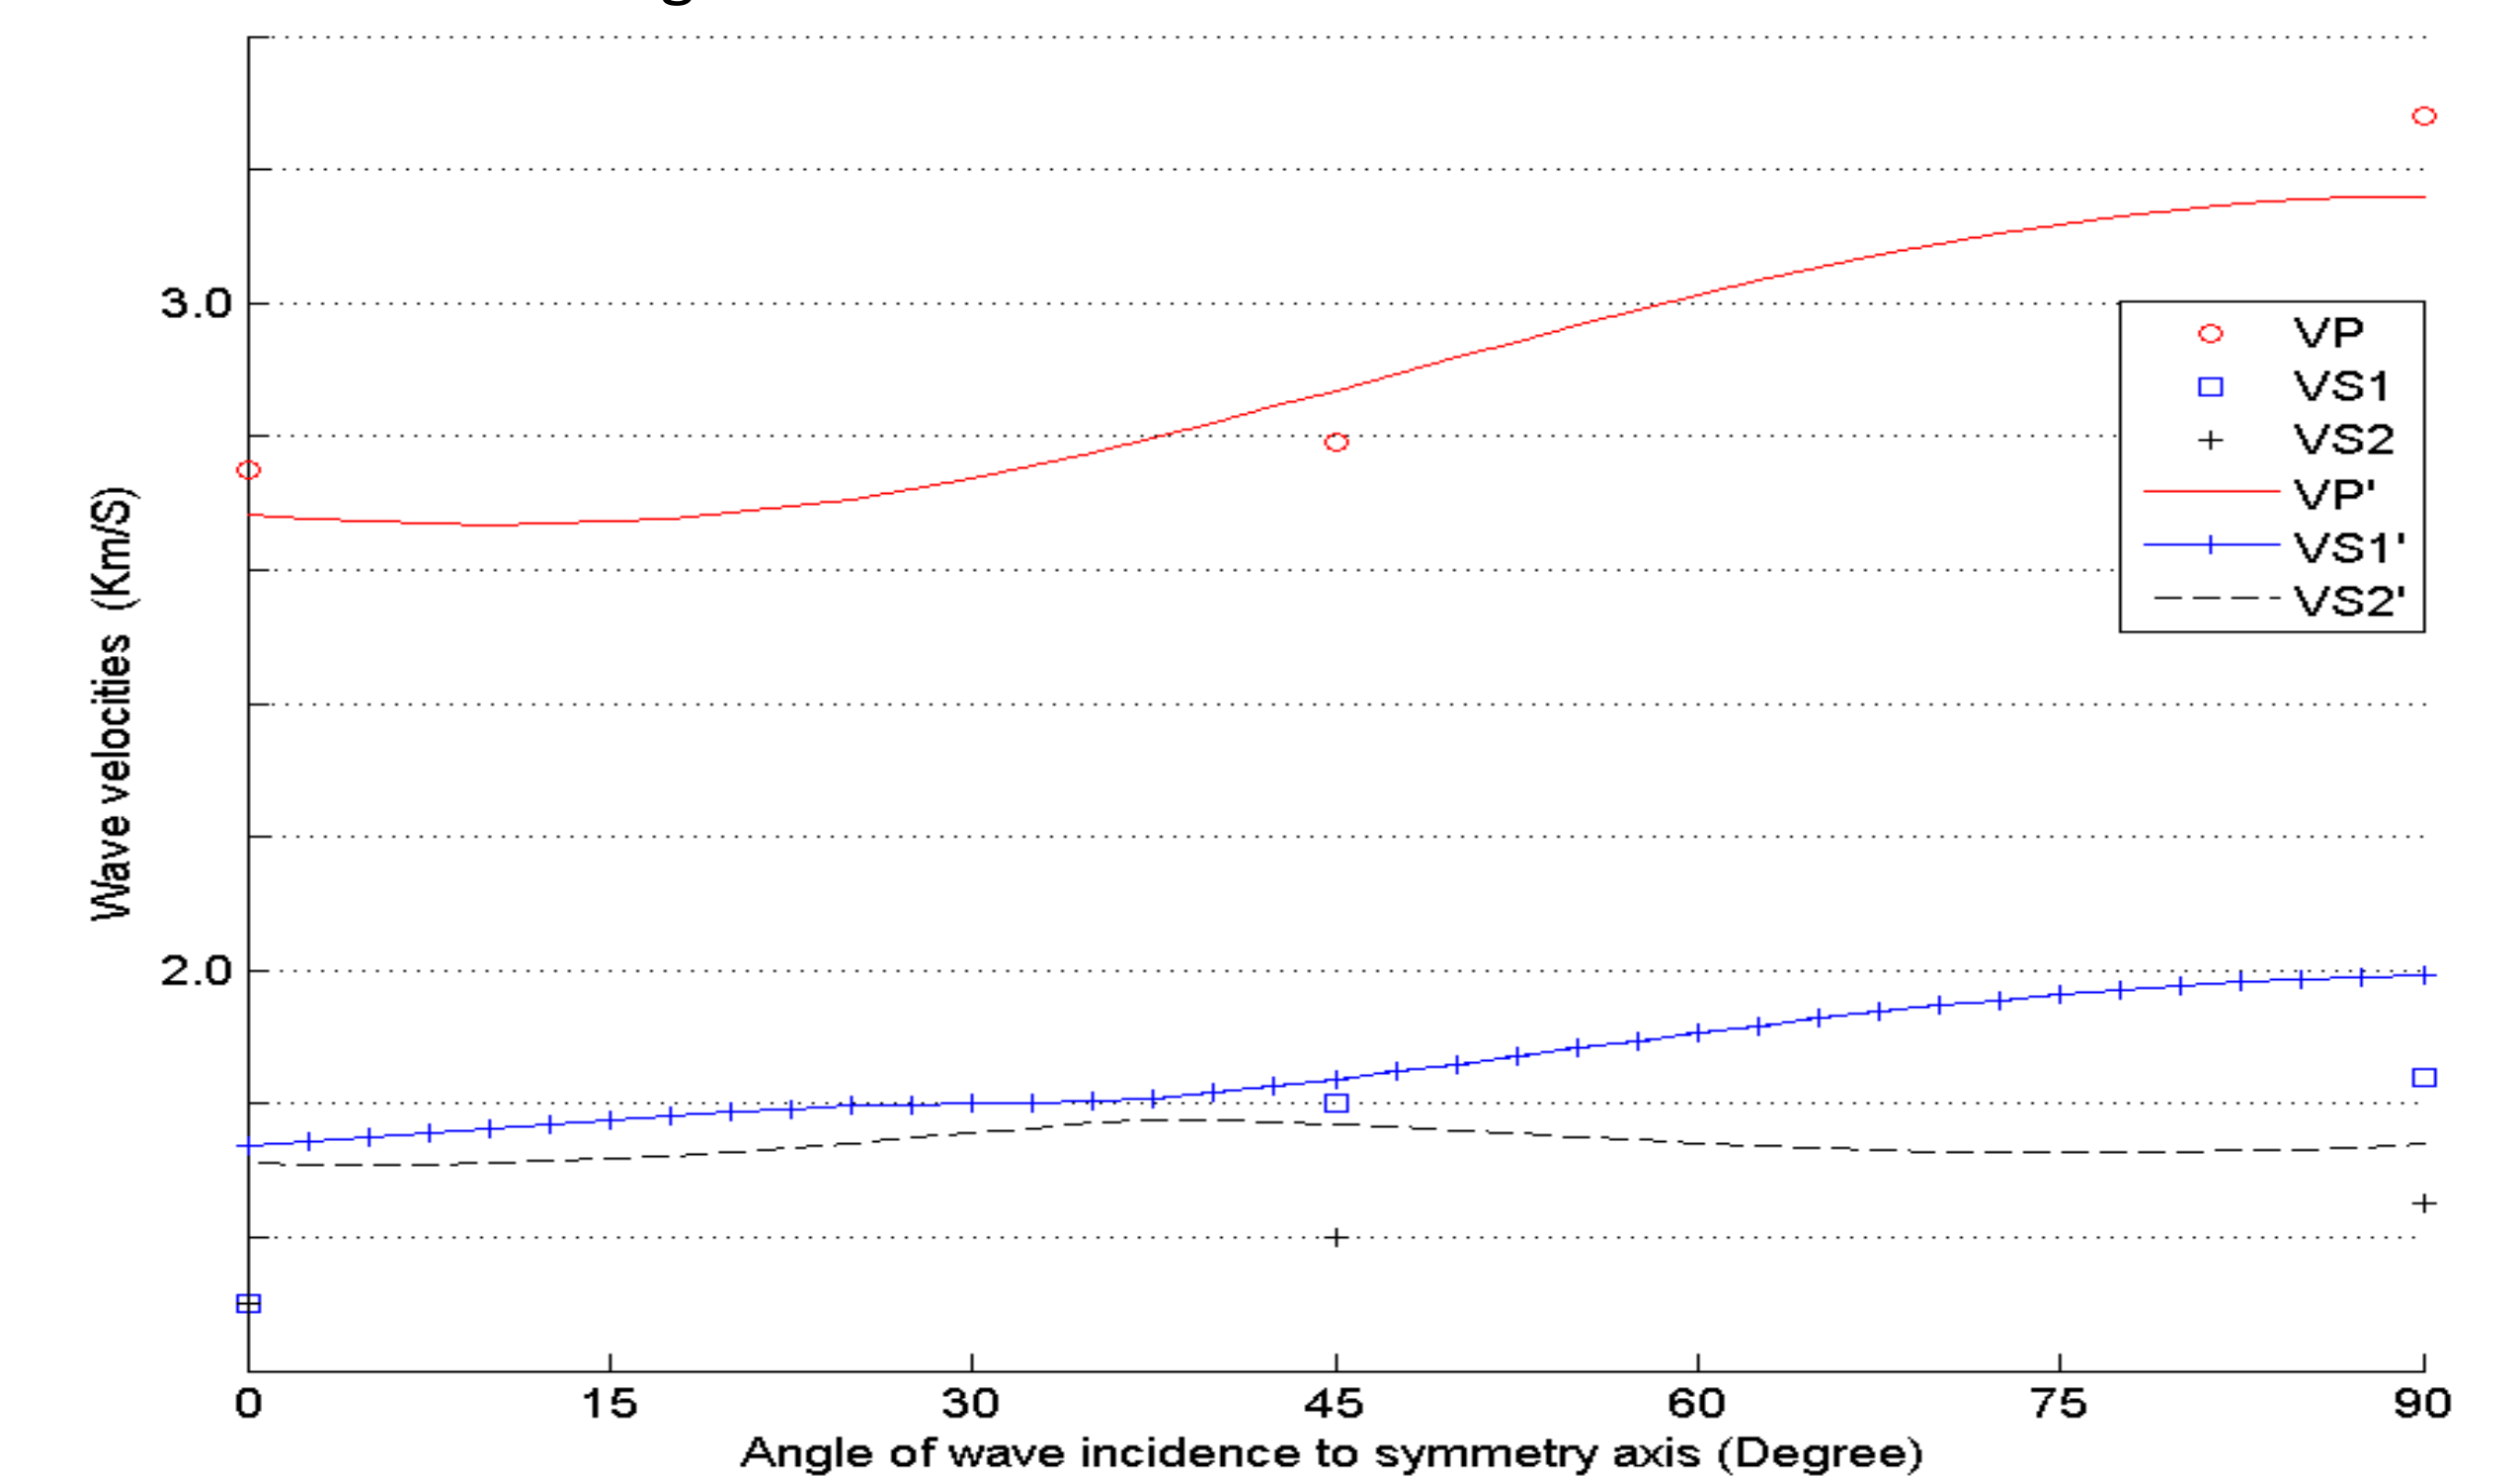


Figure 5: Comparison of experimental and calculated velocities after inversion

CONCLUSIONS

GSA method is used for microstructural characterization of Green River shale samples. One of the major advantages of GSA over other methods is that we can estimate the connectivity between pores/cracks (friability). The inversion results show that the pores have spherical shape and are well connected. The reason for the difference in the velocities between calculated and measured in the lab is due to changes in the pressure and temperature conditions while measuring the elastic moduli of the minerals. The elastic moduli of each mineral are considered from the published literature, so the conditions may not be the same for the each mineral, which contributes to the mis-match between the inversion and ultrasonic results.